

(54) ADJUSTABLE WORD PROCESSOR WORK STATION  
(71) HAMILTON SORTER CO., INC.  
(21) 10051/83 558310 (22) 5.1.83  
(31) 370467 (32) 21.4.82 (24) 21.4.82  
(43) 27.10.83 (33) US  
(51)<sup>3</sup> A47B 13/00 A47B 21/02 A47B 37/00 (44) 29.1.87  
(72) ALFRED KWIECINSKI AND JON A. YAUGER  
(74) PO  
(56) US 4379429  
US 2610099  
(57) Claim

1. A work station for a word processor having a keyboard and a console, said work station comprising:
  - a planar generally rectangular work surface;
  - a front opening in said work surface extending inwardly from the front edge of the work surface intermediate the opposite ends of the said front edge;
  - a front platform of a size to mount a keyboard thereon received within said front opening;
  - means for raising and lowering said front platform relative to said work surface;
  - a rear opening in said work surface extending inwardly from the rear edge thereof intermediate opposite ends of the said rear edge, said rear opening terminating short of said front opening;
  - a rear platform of a size to be received within the rear opening, said rear platform being adapted to mount a console thereon;
  - means for raising and lowering said rear platform relative to said rear opening, means in association with said rear platform for moving a console mounted thereon

.../2

The claims defining the invention are as follows:

1. A work station for a word processor having a keyboard and a console, said work station comprising:

a planar generally rectangular work surface;

a front opening in said work surface extending inwardly from the front edge of the work surface intermediate the opposite ends of the said front edge;

a front platform of a size to mount a keyboard thereon received within said front opening;

means for raising and lowering said front platform relative to said work surface;

a rear opening in said work surface extending inwardly from the rear edge thereof intermediate opposite ends of the said rear edge, said rear opening terminating short of said front opening;

a rear platform of a size to be received within the rear opening, said rear platform being adapted to mount a console thereon;

means for raising and lowering said rear platform relative to said rear opening, means in association with said rear platform for moving a console mounted thereon forwardly and rearwardly relative to said rear platform, means in association with the rear platform for rotating a console mounted thereon in a substantially horizontal plane relative to said rear platform, and means in association with said rear platform for tilting said rear platform about a substantially horizontal axis, whereby the front and rear platforms may be independently adjusted relative to the planar work surface to thereby adjust the relative positions of the keyboard and console of a word processor.

2. A work station as claimed in claim 1 including means in association with said front platform for tilting the platform about a substantially horizontal axis.

3. A work station as claimed in claim 1 or 2, wherein said front opening has opposite ends extending inwardly substantially at right angles to the front edge of said work surface, and walls project downwardly from the opposite ends of said front opening, wherein each of said end walls has a substantially vertical slot therein, and wherein the means for

raising and lowering said front platform comprises adjustment knobs having threaded shanks projecting inwardly through said slots, the inner ends of said threaded shanks being in threaded engagement with the adjacent ends of said front platform.

10 4. A work station as claimed in claim 1, 2 or 3 including means for tilting said front platform relative to said planar work surface about a substantially horizontal axis extending substantially parallel to the front edge of said front platform.

5. A work station as claimed in claim 4 wherein the means for tilting said front platform comprises additional substantially vertically disposed slots in said end walls, and pins projecting outwardly from the ends of said front platform, said pins being engaged in said additional slots.

20 6. A work station as claimed in any one of the preceding claims wherein a bottom wall underlies said rear opening in spaced relation thereto, and wherein the means for raising and lowering said rear platform comprises a lifting mechanism mounted on said bottom wall and operatively connected to said rear platform, said lifting mechanism including actuating mechanism accessible from the front of said work station.

30 7. A work station as claimed in claim 6 wherein said rear opening and said bottom wall define a well therebetween, and panel means closing the rear of said well, said panel means comprising a first panel secured and projecting upwardly from said bottom wall to close the lower rear portion of said well, and a second panel secured to and projecting downwardly from said rear platform, said second panel overlapping said first panel, whereby said second panel will move relative to said first panel as said rear platform is raised and lowered.

8. A work station as claimed in any one of the preceding claims wherein the means in association with said rear platform for moving a console mounted thereon forwardly and rearwardly comprises a base member overlying said rear platform, and slide means mounting said base member for slidable movement relative to said rear platform.

9. A work station as claimed in any one of the preceding claims wherein the means in association with said rear

platform for rotating a console mounted thereon comprises a base member overlying said rear platform, and means mounting said base member for rotational movement relative to said rear platform.

10. A work station as claimed in claim 8 or 9 including turntable means in association with said slide means for additionally mounting said base member for rotation relative to said rear platform.

11. A work station as claimed in any one of the preceding claims wherein the means in association with said rear platform for tilting said rear platform comprises a base member overlying said rear platform, and adjustment means for tiltably mounting said base member relative to said rear platform.

12. A work station as claimed in claim 11 wherein said adjustment means comprises rockers projecting downwardly from said base members for contact with an underlying supporting surface; bracket means projecting upwardly from the underlying surface adjacent said rockers, arcuate slots in said rockers, and adjustment knobs having threaded shanks extending through said slots and in threaded engagement with said bracket means.

13. A work station as claimed in claim 12 wherein the underlying support surface comprises a second base member interposed between said rear platform and said first named base member, and means mounting said second base member for movement in a substantially horizontal plane relative to said rear platform.

14. A work station as claimed in claim 13 wherein the means mounting said second base member for movement in a substantially horizontal plane comprises a combined slide and turntable mounting said second base member for front to rear sliding movement and for rotational movement relative to said rear platform.



15. A work station as claimed in any one of the preceding claims substantially as herein described with reference to the accompanying drawings.



DATED: 6 November, 1986.

PHILLIPS ORMONDE AND FITZPATRICK  
Attorneys for:  
HAMILTON SORTER CO., INC.

*David B. Fitzpatrick*

10 351/93

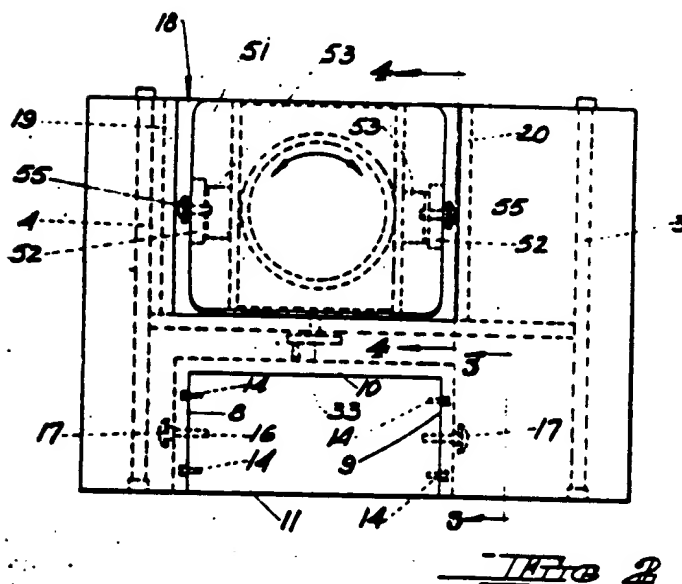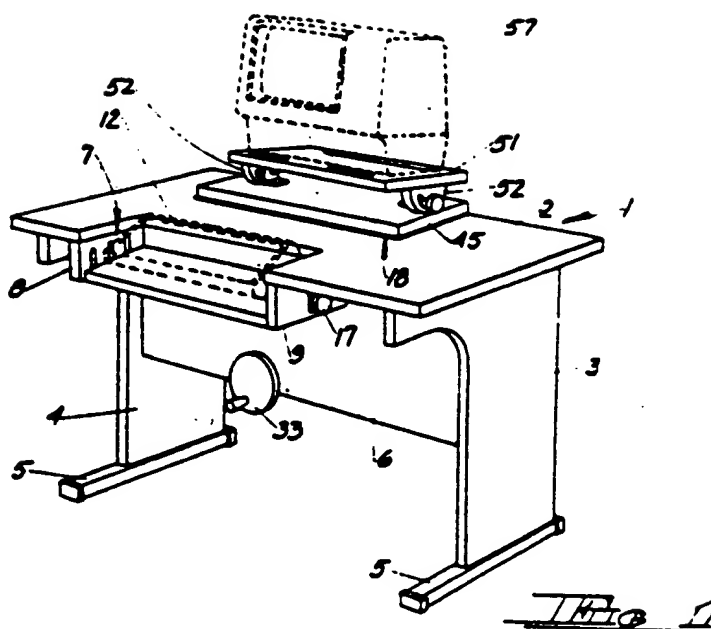

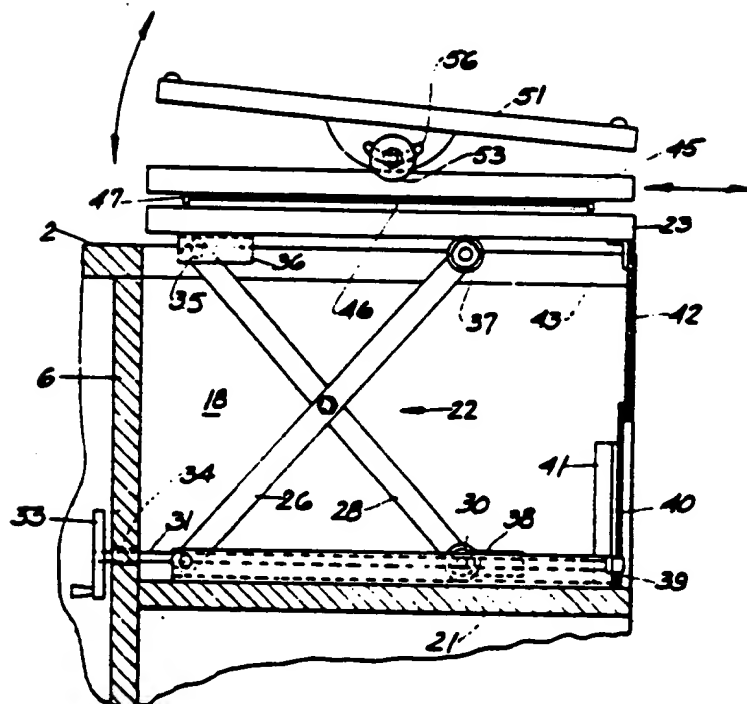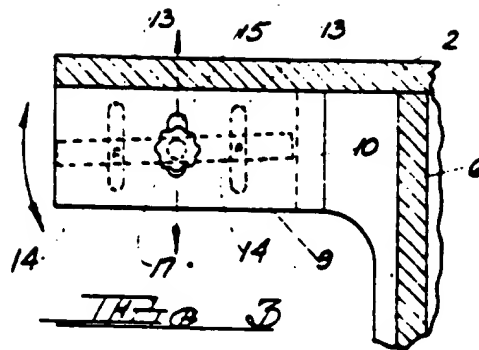

(12) AUSTRALIAN PATENT ABRIDGMENT

(19) AU

(11) AU-B-10051/83

(54) ADJUSTABLE WORD PROCESSOR WORK STATION

(71) HAMILTON SORTER CO., INC.

(21) 10051/83

558310

(22) 5.1.83

(24) 21.4.82

(31) 370467

(32) 21.4.82

(33) US

(43) 27.10.83

(44) 29.1.87

(51)<sup>3</sup> A47B 13/00 A47B 21/02 A47B 37/00

(72) ALFRED KWIECINSKI AND JON A. YAUGER

(74) PO

(56) US 4379429

US 2610099

(57) Claim

1. A work station for a word processor having a keyboard and a console, said work station comprising:
  - a planar generally rectangular work surface;
  - a front opening in said work surface extending inwardly from the front edge of the work surface intermediate the opposite ends of the said front edge;
  - a front platform of a size to mount a keyboard thereon received within said front opening;
  - means for raising and lowering said front platform relative to said work surface;
  - a rear opening in said work surface extending inwardly from the rear edge thereof intermediate opposite ends of the said rear edge, said rear opening terminating short of said front opening;
  - a rear platform of a size to be received within the rear opening, said rear platform being adapted to mount a console thereon;
  - means for raising and lowering said rear platform relative to said rear opening, means in association with said rear platform for moving a console mounted thereon

.../2

D1

2 3

116342/1

forwardly and rearwardly relative to said rear platform, means in association with the rear platform for rotating a console mounted thereon in a substantially horizontal plane relative to said rear platform, and means in association with said rear platform for tilting said rear platform about a substantially horizontal axis, whereby the front and rear platforms may be independently adjusted relative to the planar work surface to thereby adjust the relative positions of the keyboard and console of a word processor.



AUSTRALIA

558310

Patents Act

10051/83

# COMPLETE SPECIFICATION

(ORIGINAL)

Application Number: 10051/83  
Lodged:

Class

Int. Class


Complete Specification Lodged:

Accepted:

Published:

Priority:

Related Art:

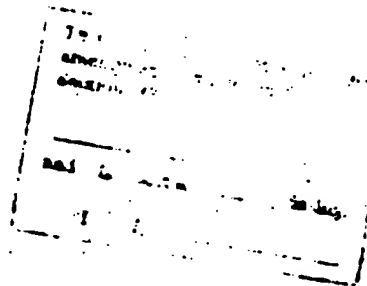

Name(s) of Applicant(s):

APPLICANT'S REF.: Hamilton Sorter AES:NG  
HAMILTON SORTER CO., INC.

Address(es) of Applicant(s):

3158 Production Drive,  
Fairfield, Ohio,  
United States of America

Actual Inventor(s):

Alfred Kwiecinski  
Jon A. Yauger

Address for Service is:

PHILLIPS, ORMONDE & FITZPATRICK  
Patent and Trade Mark Attorneys  
367 Collins Street  
Melbourne, Australia, 3000

Complete Specification for the invention entitled.

ADJUSTABLE WORD PROCESSOR WORK STATION

The following statement is a full description of this invention, including the best method of performing it known to applicant(s):

ALFRED KWIECINSKI and JON A. YAUGER  
ADJUSTABLE WORD PROCESSOR WORK STATION

This invention relates to office furniture, and more particularly to a desk-like unit or work station specifically designed to adjustably accommodate word processing equipment.

BACKGROUND OF THE INVENTION

Electronic word processing equipment is now in widespread use in commercial and industrial applications. The basic components of a word processor comprise a console, which includes the viewing screen, and a keyboard. While in some units the console and keyboard are integral and are adapted to be placed on a conventional desk, the trend has been toward separating the console and keyboard into individual units which, while interconnected electrically, are movable relative to each other so that they may be conveniently positioned in accordance with the space available and the comfort of the operator.

There has been a growing realization that the comfort and well-being of the operator greatly affects productivity, and the term "ergonomics" is now being applied to efforts which seek to adapt working conditions to suit the worker.

Studies have indicated that operator fatigue can be materially reduced if the operator can adjust the relative positions of the keyboard and console as the day progresses. In keeping with these findings, it has hitherto been proposed to provide an adjustable stand for a word processor, the stand having a front section on which the keyboard is seated and a rear section on which the console is seated, the two sections being contiguous and movable vertically relative to each other. While such arrangement provides the ability to adjust the levels of the keyboard and console relative to the operator, the

platform sections interrupt the work space available to the operator in that unless the platforms are at the same level the operator does not have an uninterrupted front to rear work surface on either side of the keyboard and console, as would be the case if the units were supported on a planar desktop or similar surface. In addition, the adjustability of the units is basically in a vertical direction although it has also been proposed to seat the console on a turntable to permit its rotation relative to the surface on which it is supported.

In contrast to the foregoing, the present invention provides a work station for the keyboard and console of a word processor which provides the operator with a full depth planar work surface and at the same time provides multidirectional adjustment of both the keyboard and console.

#### SUMMARY OF THE INVENTION

~~In accordance with the invention, the work station is~~  
 in the nature of a rectangular desk-like structure having a planar top which may be of a size to provide any desired amount of working space. The top surface of the work station has a pair of openings therein, the first extending inwardly from the front side edge of the top and the second extending inwardly from the rear side edge thereof, the openings defining wells adapted to receive vertically movable platform members having a size corresponding to the size of the openings. The front platform member is of a size to support the keyboard of a word processor, and the rear platform is of a size to support the console of the word processor. The front or keyboard platform is movable downwardly within the front well to vary the position of the keyboard, the platform additionally being pivotally mounted for tilting movement about a horizontal axis so that the keyboard may be tilted either forwardly or rearwardly in accordance with the most



### SUMMARY OF THE INVENTION

10 In accordance with the invention, the work station may be in the nature of a rectangular desk-like structure having a planar top which may be of a size to provide any desired amount of working space. The top surface of the work station may have a pair of openings therein, the first extending inwardly from the front side edge of the top and the second extending inwardly from the rear side edge thereof, the openings defining wells adapted to receive vertically movable platform members having a size corresponding to the size of the openings. The front platform member may be of a size to support the keyboard of a word processor, and the rear platform may be of a size to support the console of the word processor. The front or keyboard platform may be movable downwardly within the front well to vary the position of the keyboard, the platform additionally being pivotally mounted for tilting movement about a horizontal axis so that the keyboard may be tilted either forwardly or rearwardly in accordance with the most comfortable position of use for the operator.

20 The rear platform, which supports the console may be movable vertically relative to the rear well which contains the mechanism for raising and lowering the rear platform. The rear platform in its lowermost position of use preferably coincides with the top surface of the work station, but may be capable of being elevated relative thereto to raise the console to the desired elevated position.

30 A lower base member may be mounted on the rear platform by means of a combined turntable and slide mechanism which permits the lower base member to be moved forwardly and rearwardly relative to the rear platform and also to rotate relative to the rear platform. Thus, the lower base member may be rotated irrespective of whether it is displaced forwardly or rearwardly relative to the rear platform. The lower base may pivotally mount an upper base which is tiltable forwardly and rearwardly relative to the lower base, and the console may be seated on the upper base and hence be capable of multidirectional movement relative



to the top of the work station and the operator, the rear platform serving to raise and lower the entire assembly, the lower base permitting forward and rearward movement of the console, as well as rotational movement thereof, and the upper base permitting forward and rearward tilting movement of the console.

Adjustment mechanisms may be provided to enable the operator to raise, lower and tilt the front platform to the desired position of use, and readily accessible  
10 adjustment mechanism may also be provided to permit the operator to tilt the upper base on which the console is seated, and the lower base may also be readily accessible for rotational as well as forward and rearward movement of the console. The lifting mechanism for the rear platform, which may be located in the rear well, may be provided with a crank arm which is also readily accessible to the operator from the front of the work station. Consequently, all adjustments may be made without the operator having to leave his/her seat. A movable skirt may also be provided for  
20 the rear well to shield the platform lifting mechanism irrespective of the vertical position of the platform.

The present invention provides a work station for a word processor having a keyboard and a console, said work station comprising a planar generally rectangular work surface; a front opening in said work surface extending inwardly from the front edge of the work surface intermediate the opposite ends of the said front edge; a front platform of a size to mount a keyboard thereon received within said front opening; means for raising and lowering said front platform relative  
30 to said work surface; a rear opening in said work surface extending inwardly from the rear edge thereof intermediate opposite ends of the said rear edge, said rear opening terminating short of said front opening; a rear platform of a size to be received within the rear opening, said rear platform being adapted to mount a console thereon; means for raising and lowering said rear platform relative to said rear opening, means in association with said rear platform for moving a console mounted thereon forwardly and rearwardly relative to said rear platform, means in association with the rear platform

-35-  
for rotating a console mounted thereon in a substantially horizontal plane relative to said rear platform, and means in association with said rear platform for tilting said rear platform about a substantially horizontal axis, whereby the front and rear platforms may be independently adjusted relative to the planar work surface to thereby adjust the relative positions of the keyboard and console of a word processor.

A preferred embodiment of the present invention will now be herein described with reference to the accompanying drawings, wherein:

~~from the front of the work station. Consequently, all adjustments can be made without the operator having to leave her seat. A movable skirt is also provided for the rear well to shield the platform lifting mechanism irrespective of the vertical position of the platform.~~

#### DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a front perspective view of an adjustable work station in accordance with the invention.

FIGURE 2 is a top plan view of the work station.

FIGURE 3 is an enlarged fragmentary sectional view taken along the line 3-3 of FIGURE 2.

FIGURE 4 is an enlarged fragmentary sectional view taken along the line 4-4 of FIGURE 2.

FIGURE 5 is a fragmentary rear elevational view of the rear platform illustrating the manner in which the lower and upper bases are mounted thereon.

FIGURE 6 is a perspective view with parts broken away of the lifting mechanism for the rear platform.

#### DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring first to FIGURE 1, the work station is generally indicated at 1, the work station comprising a desk-like unit having a planar top 2 supported on leg-forming support panels 3 and 4 having feet 5, the support panels being interconnected by an intermediate vertical wall 6.

In accordance with the invention, the top 2 is provided with a front opening 7 projecting inwardly from the front side edge of the top intermediate its opposite ends. The opening 7 may be centrally disposed with respect to the top 2, or it may be displaced toward either end, depending upon the amount of work surface desired on either side of the opening.

Well-defining end walls 8 and 9, and a rear wall 10, project downwardly from the opening 7, with a front, keyboard supporting platform 11 positioned within the



well-like opening defined by the rear and end walls. The keyboard unit which is adapted to be supported on the front platform is indicated in dotted lines at 12.

The platform 11 is of a size to just nicely fit within the confines of the end walls 8 and 9, and the rear wall 10. As best seen in FIGURE 3, the end walls each has a pair of vertically disposed slots 13 adapted to slidably receive pairs of pins 14 projecting outwardly from the opposite ends of platform 11, the pins being loosely fitted within the slots which serve as guides for the front platform as it is raised and lowered. Each of the end walls is also provided with an intermediate vertically disposed slot 15 through which passes the threaded shank 16 of an adjustment knob 17, the threaded shank of each adjustment knob being in threaded engagement with the adjoining end of the front platform 11.

The adjustment knobs 16 are readily accessible to the operator, the knobs when loosened permitting the operator to raise or lower the front platform to the desired position of use, whereupon when the knobs are tightened they act to clamp the front platform 11 to the end walls 8 and 9. In addition to guiding the platform for vertical movement, the slots 13 and the pins 14 also permit the platform to be tilted forwardly and rearwardly about the axes of the threaded shanks 16 of the adjustment knobs. Such tilting movement is limited by the looseness of the fit between the pins 14 and the slots 13 in which they are received, preferably being a matter of a relatively few degrees in either direction. If a greater degree of tilting is desired, the slots may be of arcuate configuration.

The top 2 of the work station is also provided with a rear opening 18 extending inwardly from the rear side edge of the top intermediate its ends. This opening is substantially larger than the front opening 7 and



terminates inwardly short of the front opening. Preferably the vertical wall 6 will be positioned to project downwardly from the innermost side edge of the rear opening, and additional vertical end walls 19 and 20, seen in FIGURE 2, project downwardly from the opposite ends of the rear opening 18 to define a rear well therebetween. As seen in FIGURE 4, the bottom of the rear well is closed by a bottom wall 21 which provides a support for the lifting mechanism 22 which, in turn, supports rear platform 23 and acts to raise and lower the rear platform relative to the top surface 2 of the work station.

As seen in FIGURE 6, the lifting mechanism 22 comprises a pair of tracks 24 adapted to be secured to the bottom wall 21 of the rear well, the tracks having upstanding flanges 25 to which the lowermost ends of the frame members 26 are pivotally attached by pivot pins 27. The frame members 26 are pivotally connected intermediate their ends to coacting frame members 28 by means of pivot pins 29, the sets of frame members 26 and 28 defining X-frames which may be raised and lowered relative to the tracks 24, the lowermost ends of the frame members 28 mounting rollers 30 adapted to move lengthwise along the tracks 24, movement of the pairs of frame members relative to each other being controlled by a threaded shaft 31 in threaded engagement with the cross brace 32 extending between the wheels 30 at the lowermost ends of frame members 28. The threaded shaft is adapted to be rotated by a handwheel 33, the threaded shaft 31 extending forwardly through an opening 34 in the vertical wall 6, as seen in FIGURE 4.

At their upper ends the frame members 28 are pivotally connected at 35 to angle brackets 36 secured to the undersurface of rear platform 23, as also will be evident from FIGURE 4. The upper ends of the frame

members 26 mount rollers 37 adapted to contact the undersurface of rear platform 23. With this arrangement, rotation of the handwheel 33, which is accessible to the operator from the front of the work station, causes the rear platform 23 to be raised and lowered relative to the rear opening in the top of the work station. Stops 38 may be provided on the cross brace 32 to establish the lowermost position of the platform 23 when the stops contact an abutment 39 projecting upwardly from the bottom wall 21 adjacent its rear side edge.

The outer side of the rear well is closed by a lower wall panel 40 fixedly secured to the bracket 39 and to additional brackets 41 secured to the rear edges of the well defining end walls 19 and 20. An upper wall panel 42 is secured to the rear side edge of rear platform 23 by a bracket 43, the upper wall panel 42 being adapted to overlap the lower wall panel 40, the upper wall panel 42 being movable vertically with the rear platform 23, thereby closing the rear of the well irrespective of the vertical position of the rear platform.

As seen in FIGURE 5, rear platform 23 mounts a combined turntable and slide mechanism 44, which permits the lower base member 45 to be moved forwardly and rearwardly relative to the rear platform and also to be rotated relative thereto. The turntable and slide mechanism, which is of known construction, comprises a pair of generally U-shaped track members 46 adapted to slidably receive slide bars 47, the parts being configured to retain the slide bars in engagement with the tracks. A lower plate 48 is secured to the slide bars 47 and connected to an upper plate 49 by means of a circular bearing race 50 which permits relative rotation between the upper and lower plates. The upper plate 49 is secured to the undersurface of lower base member 45, thereby mounting it for both forward and rearward sliding movement

and for rotational movement relative to the lower platform 23.

An upper base member 51 having rockers 52 is mounted on the lower base member 45 by means of angle brackets 53 which are engaged by the threaded shank 54 of adjustment knobs 55 adapted to releasably clamp the rockers 52 to the brackets 53, the rockers, as seen in FIGURE 4, being provided with arcuate slots 56 through which the threaded shanks 54 pass, the arrangement permitting the upper base 51 to be tilted from the horizontal relative to the lower base 45 and secured in the desired tilted position.

When a word processor console 57, seen in FIGURE 1, is seated on the upper base 51, its position relative to the operator may be raised and lowered by means of the crank 33 which actuates the lifting mechanism 22 to raise and lower rear platform 23. The console may be moved toward or away from the operator by means of platform 45, which is also utilized to rotate the console to the desired angular position relative to the operator. Tilting movement of the console is obtained by tilting the upper base member 51 utilizing the adjustment knobs 55.

As should now be evident, the work station of the present invention provides the operator with a wide spectrum of adjustment, with both the keyboard and the console being adjustable to the needs and comfort of the operator. At the same time, the operator is provided with uninterrupted work space on either side of the keyboard and console the area of which may be chosen as desired depending upon the dimensions of the planar top of the unit.

The claims defining the invention are as follows:

1. A work station for a word processor having a keyboard and a console, said work station comprising:
  - a planar generally rectangular work surface;
  - a front opening in said work surface extending inwardly from the front edge of the work surface intermediate the opposite ends of the said front edge;
  - a front platform of a size to mount a keyboard thereon received within said front opening;
  - means for raising and lowering said front platform relative to said work surface;
  - a rear opening in said work surface extending inwardly from the rear edge thereof intermediate opposite ends of the said rear edge, said rear opening terminating short of said front opening;
  - a rear platform of a size to be received within the rear opening, said rear platform being adapted to mount a console thereon;
  - means for raising and lowering said rear platform relative to said rear opening, means in association with said rear platform for moving a console mounted thereon forwardly and rearwardly relative to said rear platform, means in association with the rear platform for rotating a console mounted thereon in a substantially horizontal plane relative to said rear platform, and means in association with said rear platform for tilting said rear platform about a substantially horizontal axis, whereby the front and rear platforms may be independently adjusted relative to the planar work surface to thereby adjust the relative positions of the keyboard and console of a word processor.
2. A work station as claimed in claim 1 including means in association with said front platform for tilting the platform about a substantially horizontal axis.
3. A work station as claimed in claim 1 or 2, wherein said front opening has opposite ends extending inwardly substantially at right angles to the front edge of said work surface, and walls project downwardly from the opposite ends of said front opening, wherein each of said end walls has a substantially vertical slot therein, and wherein the means for

raising and lowering said front platform comprises adjustment knobs having threaded shanks projecting inwardly through said slots, the inner ends of said threaded shanks being in threaded engagement with the adjacent ends of said front platform.

4. A work station as claimed in claim 1, 2 or 3 including means for tilting said front platform relative to said planar work surface about a substantially horizontal axis extending substantially parallel to the front edge of said front platform.

5. A work station as claimed in claim 4 wherein the means for tilting said front platform comprises additional substantially vertically disposed slots in said end walls, and pins projecting outwardly from the ends of said front platform, said pins being engaged in said additional slots.

6. A work station as claimed in any one of the preceding claims wherein a bottom wall underlies said rear opening in spaced relation thereto, and wherein the means for raising and lowering said rear platform comprises a lifting mechanism mounted on said bottom wall and operatively connected to said rear platform, said lifting mechanism including actuating mechanism accessible from the front of said work station.

7. A work station as claimed in claim 6 wherein said rear opening and said bottom wall define a well therebetween, and panel means closing the rear of said well, said panel means comprising a first panel secured and projecting upwardly from said bottom wall to close the lower rear portion of said well, and a second panel secured to and projecting downwardly from said rear platform, said second panel overlapping said first panel, whereby said second panel will move relative to said first panel as said rear platform is raised and lowered.

8. A work station as claimed in any one of the preceding claims wherein the means in association with said rear platform for moving a console mounted thereon forwardly and rearwardly comprises a base member overlying said rear platform, and slide means mounting said base member for slidable movement relative to said rear platform.

9. A work station as claimed in any one of the preceding claims wherein the means in association with said rear

platform for rotating a console mounted thereon comprises a base member overlying said rear platform, and means mounting said base member for rotational movement relative to said rear platform.

10. A work station as claimed in claim 8 or 9 including turntable means in association with said slide means for additionally mounting said base member for rotation relative to said rear platform.

11. A work station as claimed in any one of the preceding claims wherein the means in association with said rear platform for tilting said rear platform comprises a base member overlying said rear platform, and adjustment means for tiltably mounting said base member relative to said rear platform.

12. A work station as claimed in claim 11 wherein said adjustment means comprises rockers projecting downwardly from said base members for contact with an underlying supporting surface; bracket means projecting upwardly from the underlying surface adjacent said rockers, arcuate slots in said rockers, and adjustment knobs having threaded shanks extending through said slots and in threaded engagement with said bracket means.

13. A work station as claimed in claim 12 wherein the underlying support surface comprises a second base member interposed between said rear platform and said first named base member, and means mounting said second base member for movement in a substantially horizontal plane relative to said rear platform.

14. A work station as claimed in claim 13 wherein the means mounting said second base member for movement in a substantially horizontal plane comprises a combined slide and turntable mounting said second base member for front to rear sliding movement and for rotational movement relative to said rear platform.



15. A work station as claimed in any one of the preceding claims substantially as herein described with reference to the accompanying drawings.

DATED: 6 November, 1986.

PHILLIPS ORMONDE AND FITZPATRICK  
Attorneys for:  
HAMILTON BORTER CO., INC.

*David B. Fitzpatrick*

10 051/83

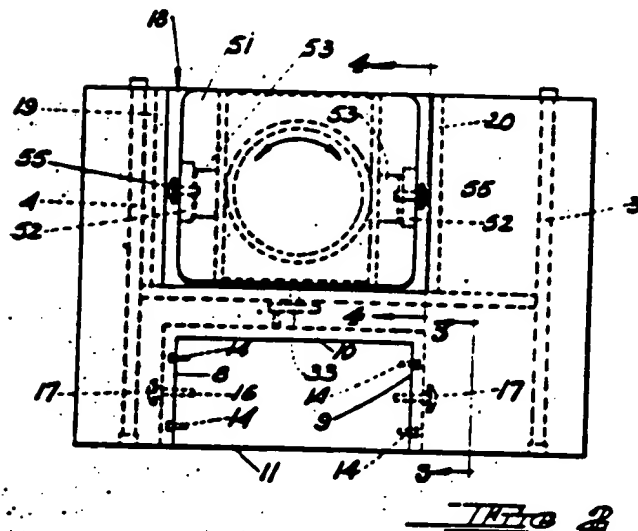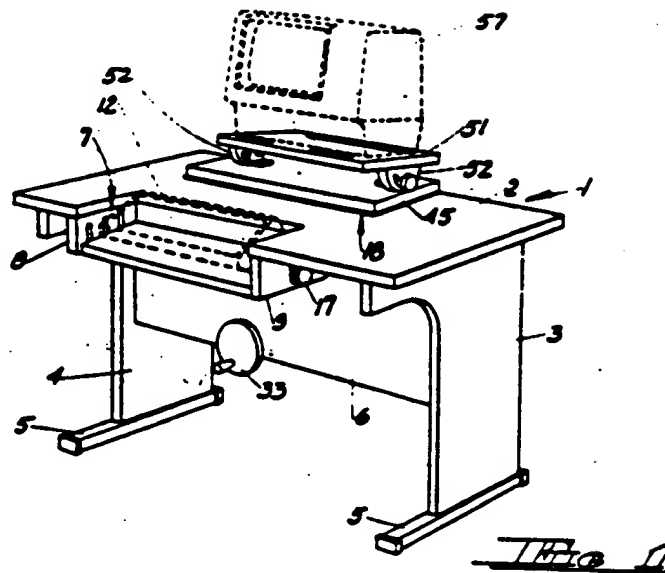




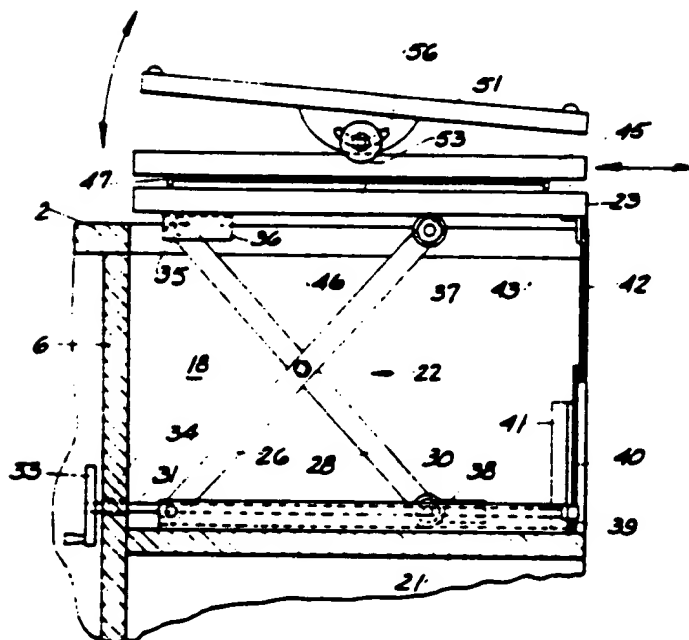



Fig. 4

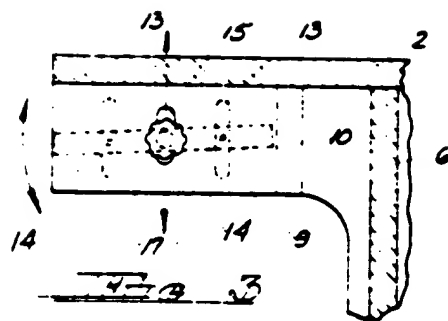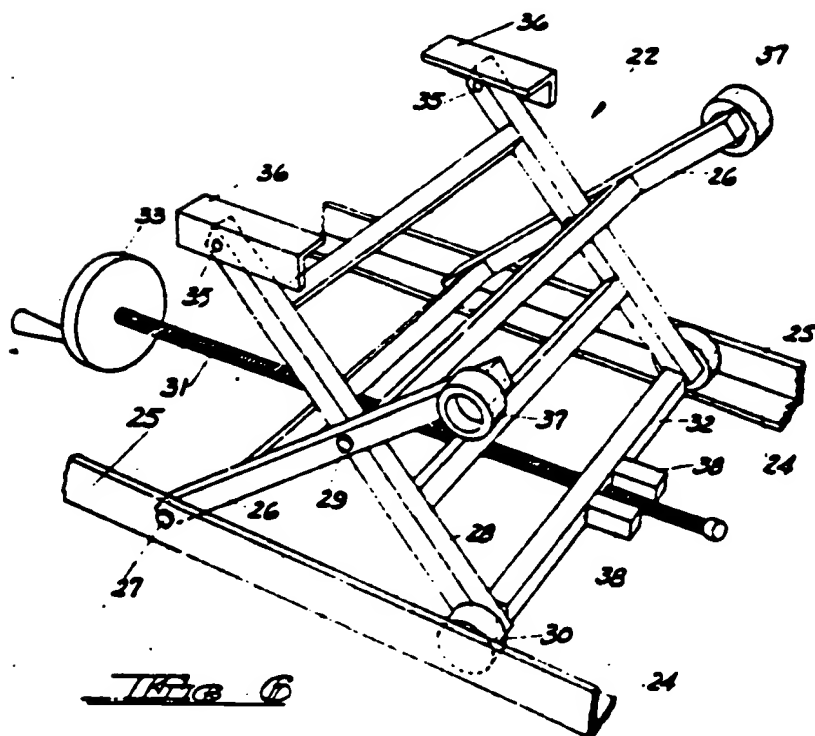

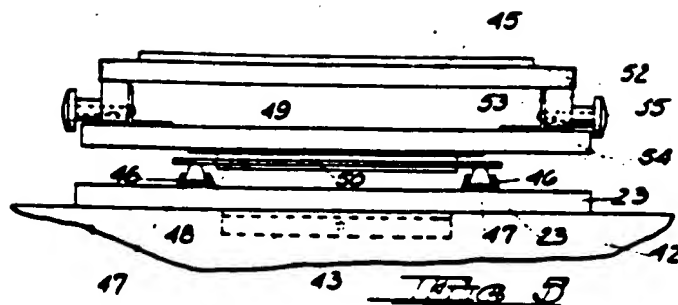

# **REEDFAX®**

THE PATENT CONNECTION

 A member of the Reed Elsevier plc group

REEDFAX Document Delivery System  
275 Gibraltar Road • Horsham, PA 19044 • USA  
Voice 1.800.422.1337 or 1.215.441.4768  
FAX 1.800.421.5585 or 1.215.441.5463

## **Our services include:**

- U.S. Patents from #1 to current week of issue
- Design and Plant Patents
- Reissue Patents and Re-exam Certificates
- U.S., EP and Canadian File Histories/Wrappers
- Non-US Patents including European and World
- Trademarks and Trademark File Histories
- An Automated System that operates in 15 min.  
24 hrs./day, 365 days/yr.
- Dedicated Customer Service Staff

**TO REPORT TROUBLE WITH THIS TRANSMISSION or for REEDFAX CUSTOMER SERVICE,  
CALL 1.800.422.1337. ONCE CONNECTED, IMMEDIATELY PRESS "0" (ZERO) FOR OPERATOR.**

---

**TO: Tom Parker**

---

**Foreign Patent**  
**Company Number:** 1311  
**Account Number:** 942680  
**Client Reference:** 104021

**Order Number:** 132070

**Date:** 11/4/1999

**Control Number:** 39135

**Patent Number:** AU 558310

**Pages:** 21

**REEDFAX Code:** FP-Prt-Cour-Lib  
**Request Number:** 1

### **CHARGES FOR THIS PATENT:**

Basic Charge:	\$	16.00
Extra Pages:	\$	0.00
Special Serv:	\$	0.00
Surcharge:	\$	0.00
<b>Total:</b>	<b>\$</b>	<b>16.00</b>

Discount D6

Charges listed are for **informational purposes** only  
and do not include applicable tax, other adjustments  
or shipping charges.

**\*\*\*\* < THIS IS NOT A BILL > \*\*\*\***

558310

AUSTRALIA

Patents Act

APPLICATION FOR A PATENT

10051/83

(b) Insert FULL  
name(s) of  
applicant(s)

I/We (b)

HAMILTON SORTER CO., INC.

(c) Insert FULL  
address(es) of  
applicant(s)

of (c)

3158 Production Drive  
Fairfield, Ohio  
United States of America

(d) Insert TITLE  
of invention

hereby apply for the grant of a Patent for an invention entitled

(d)

ADJUSTABLE WORD PROCESSOR WORK STATION

(e) Insert "complete"  
OR "provisional"

which is described in the accompanying (e) complete

specification

(Note: The following paragraph applies only to Convention applications)

This application is a Convention application based on the basic application(s) for a patent or similar protection identified by number, country, and filing date as follows:

(f)

Serial No. 370,467 APPLICATION ACCEPTED AND AMENDED  
April 21, 1982  
United States of America

LODGED AT SUB-OFFICE  
-5 JAN 1983  
Melbourne

Address for Service:

PHILLIPS ORMONDE AND FITZPATRICK  
Patent and Trade Mark Attorneys  
367 Collins Street  
Melbourne, Australia 3000

(g) Insert DATE  
of signing

Dated (g) November 22, 1982

(h) Signature of  
applicant(s)  
(For body  
corporate  
see heading)

(h) HAMILTON SORTER CO., INC.

By [Signature]  
President

(i) Corporate seal  
if any  
Note: No legalization  
or other witness  
required

PHILLIPS ORMONDE AND FITZPATRICK  
Patent and Trade Mark Attorneys  
367 Collins Street  
Melbourne, Australia

# AUSTRALIA

Patents Act

## DECLARATION FOR A PATENT APPLICATION

**INSTRUCTIONS**  
(a) Insert "Convention"  
if applicable  
(b) Insert FULL name(s)  
of applicant(s)

In support of the (a) convention application made by  
(b)

HAMILTON SORTER CO., INC.

100 68

(c) Insert "of addition"  
if applicable  
(d) Insert TITLE of  
invention

(hereinafter called "applicant(s) for a patent (c)  
invention entitled (d)

for an

### ADJUSTABLE WORD PROCESSOR WORK STATION

(e) Insert FULL name(s)  
AND address(es) of  
declarant(s)  
(See heading\*)

I/We (a) Alfred Kwiecinski, President of  
Hamilton Sorter Co., Inc.  
3158 Production Drive, Fairfield, Ohio  
United States of America

do solemnly and sincerely declare as follows:

1. ~~I am/We are the applicant(s)-~~  
(or, in the case of an application by a body corporate)
1. I am/We are authorized to make this declaration on behalf of the applicant(s).
2. ~~I am/We are the actual inventor(s) of the invention-~~  
(or, where the applicant(s) is/are not the actual inventor(s))
2. (f)

Alfred Kwiecinski  
6 Stonington West  
Fairfield, Ohio

Jon A. Yauger  
1532 Fvalie Drive  
Fairfield, Ohio

United States of America United States of America  
as/are the actual inventor(s) of the invention and the facts upon which the applicant(s)  
is/are entitled to make the application are as follows:

- (g) Applicant is the assignee of the invention from the  
actual inventors by Deed of Assignment executed  
March 30, 1982.

(Note: Paragraphs 3 and 4 apply only to Convention applications)

3. The basic application(s) for patent or similar protection on which the application is based  
is/are identified by country, filing date, and basic applicant(s) as follows:

(a) United States of America  
April 21, 1982  
Serial No. 370,467

4. The basic application(s) referred to in paragraph 3 hereof was/were the first application(s)  
made in a Convention country in respect of the invention the subject of the application.

(h) Insert PLACE of  
signing

(i) Insert DATE of  
signing

(m) Signatures of  
declarant(s)

Notes: No limitation on  
other witnesses required

Declared at (a) Fairfield, Ohio U.S.A.

Dated (b) November 22, 1982

(m) Alfred Kwiecinski  
Alfred Kwiecinski, President

For The Commissioner of Patents

PH/2/M

PHILLIPS ORMONDE & FITZPATRICK  
Patent and Trade Mark Attorneys  
367 Collins Street  
Melbourne, Australia

(12) AUSTRALIAN PATENT ABRIDGMENT

(19) AU

(11) AU-B-10051/83

(54) ADJUSTABLE WORD PROCESSOR WORK STATION

(71) HAMILTON SORTER CO., INC.

(21) 10051/83

558310

(22) 5.1.83

(24) 21.4.82

(31) 370467

(32) 21.4.82

(33) US

(43) 27.10.83

(44) 29.1.87

(51)<sup>3</sup> A47B 13/00 A47B 21/02 A47B 37/00

(72) ALFRED KWIECINSKI AND JON A. YAUGER

(74) PO

(56) US 4379429

US 2610099

(57) Claim

1. A work station for a word processor having a keyboard and a console, said work station comprising:

a planar generally rectangular work surface;

a front opening in said work surface extending inwardly from the front edge of the work surface intermediate the opposite ends of the said front edge;

a front platform of a size to mount a keyboard thereon received within said front opening;

means for raising and lowering said front platform relative to said work surface;

a rear opening in said work surface extending inwardly from the rear edge thereof intermediate opposite ends of the said rear edge, said rear opening terminating short of said front opening;

a rear platform of a size to be received within the rear opening, said rear platform being adapted to mount a console thereon;

means for raising and lowering said rear platform relative to said rear opening, means in association with said rear platform for moving a console mounted thereon

.../2

forwardly and rearwardly relative to said rear platform, means in association with the rear platform for rotating a console mounted thereon in a substantially horizontal plane relative to said rear platform, and means in association with said rear platform for tilting said rear platform about a substantially horizontal axis, whereby the front and rear platforms may be independently adjusted relative to the planar work surface to thereby adjust the relative positions of the keyboard and console of a word processor.

1  
AUSTRALIA

558310

Patents Act

10051/83

**COMPLETE SPECIFICATION**  
(ORIGINAL)

Application Number:  
Lodged:

10051/83

Class

Int. Class

Complete Specification Lodged:

Accepted:

Published:

Priority:

Related Art:

Name(s) of Applicant(s):

APPLICANT'S REF.: Hamilton Sorter AES:NG

HAMILTON SORTER CO., INC.

Address(es) of Applicant(s):

3158 Production Drive,  
Fairfield, Ohio,  
United States of America

Actual Inventor(s):

Alfred Kwiecinski  
Jon A. Yaeger

Address for Service is:

PHILLIPS, ORMONDE & FITZPATRICK  
Patent and Trade Mark Attorneys  
367 Collins Street  
Melbourne, Australia. 3000

Complete Specification for the invention entitled.

**ADJUSTABLE WORD PROCESSOR WORK STATION**

The following statement is a full description of this invention, including the best method of performing it known to applicant(s):

ALFRED KWIECINSKI and JON A. YAUGER  
ADJUSTABLE WORD PROCESSOR WORK STATION

This invention relates to office furniture, and more particularly to a desk-like unit or work station specifically designed to adjustably accommodate word processing equipment.

BACKGROUND OF THE INVENTION

Electronic word processing equipment is now in widespread use in commercial and industrial applications. The basic components of a word processor comprise a console, which includes the viewing screen, and a keyboard. While in some units the console and keyboard are integral and are adapted to be placed on a conventional desk, the trend has been toward separating the console and keyboard into individual units which, while interconnected electrically, are movable relative to each other so that they may be conveniently positioned in accordance with the space available and the comfort of the operator.

There has been a growing realization that the comfort and well-being of the operator greatly effects productivity, and the term "ergonomics" is now being applied to efforts which seek to adapt working conditions to suit the worker.

Studies have indicated that operator fatigue can be materially reduced if the operator can adjust the relative positions of the keyboard and console as the day progresses. In keeping with these findings, it has hitherto been proposed to provide an adjustable stand for a word processor, the stand having a front section on which the keyboard is seated and a rear section on which the console is seated, the two sections being contiguous and movable vertically relative to each other. While such arrangement provides the ability to adjust the levels of the keyboard and console relative to the operator, the

4



platform sections interrupt the work space available to the operator in that unless the platforms are at the same level the operator does not have an uninterrupted front to rear work surface on either side of the keyboard and console, as would be the case if the units were supported on a planar desktop or similar surface. In addition, the adjustability of the units is basically in a vertical direction although it has also been proposed to seat the console on a turntable to permit its rotation relative to the surface on which it is supported.

In contrast to the foregoing, the present invention provides a work station for the keyboard and console of a word processor which provides the operator with a full depth planar work surface and at the same time provides multidirectional adjustment of both the keyboard and console.

#### SUMMARY OF THE INVENTION

~~In accordance with the invention, the work station is in the nature of a rectangular desk-like structure having a planar top which may be of a size to provide any desired amount of working space. The top surface of the work station has a pair of openings therein, the first extending inwardly from the front side edge of the top and the second extending inwardly from the rear side edge thereof, the openings defining wells adapted to receive vertically movable platform members having a size corresponding to the size of the openings. The front platform member is of a size to support the keyboard of a word processor, and the rear platform is of a size to support the console of the word processor. The front or keyboard platform is movable downwardly within the front well to vary the position of the keyboard, the platform additionally being pivotally mounted for tilting movement about a horizontal axis so that the keyboard may be tilted either forwardly or rearwardly in accordance with the most~~

4

## SUMMARY OF THE INVENTION

In accordance with the invention, the work station may be in the nature of a rectangular desk-like structure having a planar top which may be of a size to provide any desired amount of working space. The top surface of the work station may have a pair of openings therein, the first extending inwardly from the front side edge of the top and the second extending inwardly from the rear side edge thereof, the openings defining wells adapted to receive vertically movable platform members having a size corresponding to the size of the openings. The front platform member may be of a size to support the keyboard of a word processor, and the rear platform may be of a size to support the console of the word processor. The front or keyboard platform may be movable downwardly within the front well to vary the position of the keyboard, the platform additionally being pivotally mounted for tilting movement about a horizontal axis so that the keyboard may be tilted either forwardly or rearwardly in accordance with the most comfortable position of use for the operator.

The rear platform, which supports the console may be movable vertically relative to the rear well which contains the mechanism for raising and lowering the rear platform. The rear platform in its lowermost position of use preferably coincides with the top surface of the work station, but may be capable of being elevated relative thereto to raise the console to the desired elevated position.

A lower base member may be mounted on the rear platform by means of a combined turntable and slide mechanism which permits the lower base member to be moved forwardly and rearwardly relative to the rear platform and also to rotate relative to the rear platform. Thus, the lower base member may be rotated irrespective of whether it is displaced forwardly or rearwardly relative to the rear platform. The lower base may pivotally mount an upper base which is tiltable forwardly and rearwardly relative to the lower base, and the console may be seated on the upper base and hence be capable of multidirectional movement relative

to the top of the work station and the operator, the rear platform serving to raise and lower the entire assembly, the lower base permitting forward and rearward movement of the console, as well as rotational movement thereof, and the upper base permitting forward and rearward tilting movement of the console.

Adjustment mechanisms may be provided to enable the operator to raise, lower and tilt the front platform to the desired position of use, and readily accessible  
10 adjustment mechanism may also be provided to permit the operator to tilt the upper base on which the console is seated, and the lower base may also be readily accessible for rotational as well as forward and rearward movement of the console. The lifting mechanism for the rear platform, which may be located in the rear well, may be provided with a crank arm which is also readily accessible to the operator from the front of the work station. Consequently, all adjustments may be made without the operator having to  
20 leave his/her seat. A movable skirt may also be provided for the rear well to shield the platform lifting mechanism irrespective of the vertical position of the platform.

The present invention provides a work station for a word processor having a keyboard and a console, said work station comprising a planar generally rectangular work surface; a front opening in said work surface extending inwardly from the front edge of the work surface intermediate the opposite ends of the said front edge; a front platform of a size to mount a keyboard thereon received within said front opening; means for raising and lowering said front platform relative  
30 to said work surface; a rear opening in said work surface extending inwardly from the rear edge thereof intermediate opposite ends of the said rear edge, said rear opening terminating short of said front opening; a rear platform of a size to be received within the rear opening, said rear platform being adapted to mount a console thereon; means for raising and lowering said rear platform relative to said rear opening, means in association with said rear platform for moving a console mounted thereon forwardly and rearwardly relative to said  
39 rear platform, means in association with the rear platform

*L*

for rotating a console mounted thereon in a substantially horizontal plane relative to said rear platform, and means in association with said rear platform for tilting said rear platform about a substantially horizontal axis, whereby the front and rear platforms may be independently adjusted relative to the planar work surface to thereby adjust the relative positions of the keyboard and console of a word processor.

A preferred embodiment of the present invention will now be herein described with reference to the accompanying drawings, wherein:

10

20

30

19

~~from the front of the work station. Consequently, all adjustments can be made without the operator having to leave her seat. A movable skirt is also provided for the rear well to shield the platform lifting mechanism irrespective of the vertical position of the platform.~~

#### DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a front perspective view of an adjustable work station in accordance with the invention.

FIGURE 2 is a top plan view of the work station.

FIGURE 3 is an enlarged fragmentary sectional view taken along the line 3-3 of FIGURE 2.

FIGURE 4 is an enlarged fragmentary sectional view taken along the line 4-4 of FIGURE 2.

FIGURE 5 is a fragmentary rear elevational view of the rear platform illustrating the manner in which the lower and upper bases are mounted thereon.

FIGURE 6 is a perspective view with parts broken away of the lifting mechanism for the rear platform.

#### DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring first to FIGURE 1, the work station is generally indicated at 1, the work station comprising a desk-like unit having a planar top 2 supported on leg-forming support panels 3 and 4 having feet 5, the support panels being interconnected by an intermediate verticle wall 6.

In accordance with the invention, the top 2 is provided with a front opening 7 projecting inwardly from the front side edge of the top intermediate its opposite ends. The opening 7 may be centrally disposed with respect to the top 2, or it may be displaced toward either end, depending upon the amount of work surface desired on either side of the opening.

Well-defining end walls 8 and 9, and a rear wall 10, project downwardly from the opening 7, with a front, keyboard supporting platform 11 positioned within the

well-like opening defined by the rear and end walls. The keyboard unit which is adapted to be supported on the front platform is indicated in dotted lines at 12.

The platform 11 is of a size to just nicely fit within the confines of the end walls 8 and 9, and the rear wall 10. As best seen in FIGURE 3, the end walls each has a pair of vertically disposed slots 13 adapted to slidably receive pairs of pins 14 projecting outwardly from the opposite ends of platform 11, the pins being loosely fitted within the slots which serve as guides for the front platform as it is raised and lowered. Each of the end walls is also provided with an intermediate vertically disposed slot 15 through which passes the threaded shank 16 of an adjustment knob 17, the threaded shank of each adjustment knob being in threaded engagement with the adjoining end of the front platform 11.

The adjustment knobs 16 are readily accessible to the operator, the knobs when loosened permitting the operator to raise or lower the front platform to the desired position of use, whereupon when the knobs are tightened they act to clamp the front platform 11 to the end walls 8 and 9. In addition to guiding the platform for vertical movement, the slots 13 and the pins 14 also permit the platform to be tilted forwardly and rearwardly about the axes of the threaded shanks 16 of the adjustment knobs. Such tilting movement is limited by the looseness of the fit between the pins 14 and the slots 13 in which they are received, preferably being a matter of a relatively few degrees in either direction. If a greater degree of tilting is desired, the slots may be of arcuate configuration.

The top 2 of the work station is also provided with a rear opening 18 extending inwardly from the rear side edge of the top intermediate its ends. This opening is substantially larger than the front opening 7 and

terminates inwardly short of the front opening. Preferably the vertical wall 6 will be positioned to project downwardly from the innermost side edge of the rear opening, and additional vertical end walls 19 and 20, seen in FIGURE 2, project downwardly from the opposite ends of the rear opening 18 to define a rear well therebetween. As seen in FIGURE 4, the bottom of the rear well is closed by a bottom wall 21 which provides a support for the lifting mechanism 22 which, in turn, supports rear platform 23 and acts to raise and lower the rear platform relative to the top surface 2 of the work station.

As seen in FIGURE 6, the lifting mechanism 22 comprises a pair of tracks 24 adapted to be secured to the bottom wall 21 of the rear well, the tracks having upstanding flanges 25 to which the lowermost ends of the frame members 26 are pivotally attached by pivot pins 27. The frame members 26 are pivotally connected intermediate their ends to coacting frame members 28 by means of pivot pins 29, the sets of frame members 26 and 28 defining X-frames which may be raised and lowered relative to the tracks 24, the lowermost ends of the frame members 28 mounting rollers 30 adapted to move lengthwise along the tracks 24, movement of the pairs of frame members relative to each other being controlled by a threaded shaft 31 in threaded engagement with the cross brace 32 extending between the wheels 30 at the lowermost ends of frame members 28. The threaded shaft is adapted to be rotated by a handwheel 33, the threaded shaft 31 extending forwardly through an opening 34 in the vertical wall 6, as seen in FIGURE 4.

At their upper ends the frame members 28 are pivotally connected at 35 to angle brackets 36 secured to the undersurface of rear platform 23, as also will be evident from FIGURE 4. The upper ends of the frame

members 26 mount rollers 37 adapted to contact the undersurface of rear platform 23. With this arrangement, rotation of the handwheel 33, which is accessible to the operator from the front of the work station, causes the rear platform 23 to be raised and lowered relative to the rear opening in the top of the work station. Stops 38 may be provided on the cross brace 32 to establish the lowermost position of the platform 23 when the stops contact an abutment 39 projecting upwardly from the bottom wall 21 adjacent its rear side edge.

The outer side of the rear well is closed by a lower wall panel 40 fixedly secured to the bracket 39 and to additional brackets 41 secured to the rear edges of the well defining end walls 19 and 20. An upper wall panel 42 is secured to the rear side edge of rear platform 23 by a bracket 43, the upper wall panel 42 being adapted to overlap the lower wall panel 40, the upper wall panel 42 being movable vertically with the rear platform 23, thereby closing the rear of the well irrespective of the vertical position of the rear platform.

As seen in FIGURE 5, rear platform 23 mounts a combined turntable and slide mechanism 44, which permits the lower base member 45 to be moved forwardly and rearwardly relative to the rear platform and also to be rotated relative thereto. The turntable and slide mechanism, which is of known construction, comprises a pair of generally U-shaped track members 46 adapted to slidably receive slide bars 47, the parts being configured to retain the slide bars in engagement with the tracks. A lower plate 48 is secured to the slide bars 47 and connected to an upper plate 49 by means of a circular bearing race 50 which permits relative rotation between the upper and lower plates. The upper plate 49 is secured to the undersurface of lower base member 45, thereby mounting it for both forward and rearward sliding movement



and for rotational movement relative to the lower platform 23.

An upper base member 51 having rockers 52 is mounted on the lower base member 45 by means of angle brackets 53 which are engaged by the threaded shank 54 of adjustment knobs 55 adapted to releasably clamp the rockers 52 to the brackets 53, the rockers, as seen in FIGURE 4, being provided with arcuate slots 56 through which the threaded shanks 54 pass, the arrangement permitting the upper base 51 to be tilted from the horizontal relative to the lower base 45 and secured in the desired tilted position.

When a word processor console 57, seen in FIGURE 1, is seated on the upper base 51, its position relative to the operator may be raised and lowered by means of the crank 33 which actuates the lifting mechanism 22 to raise and lower rear platform 23. The console may be moved toward or away from the operator by means of platform 45, which is also utilized to rotate the console to the desired angular position relative to the operator. Tilting movement of the console is obtained by tilting the upper base member 51 utilizing the adjustment knobs 55.

As should now be evident, the work station of the present invention provides the operator with a wide spectrum of adjustment, with both the keyboard and the console being adjustable to the needs and comfort of the operator. At the same time, the operator is provided with uninterrupted work space on either side of the keyboard and console the area of which may be chosen as desired depending upon the dimensions of the planar top of the unit.

The claims defining the invention are as follows:

1. A work station for a word processor having a keyboard and a console, said work station comprising:

a planar generally rectangular work surface;

a front opening in said work surface extending inwardly from the front edge of the work surface intermediate the opposite ends of the said front edge;

a front platform of a size to mount a keyboard thereon received within said front opening;

means for raising and lowering said front platform relative to said work surface;

a rear opening in said work surface extending inwardly from the rear edge thereof intermediate opposite ends of the said rear edge, said rear opening terminating short of said front opening;

a rear platform of a size to be received within the rear opening, said rear platform being adapted to mount a console thereon;

means for raising and lowering said rear platform relative to said rear opening, means in association with said rear platform for moving a console mounted thereon forwardly and rearwardly relative to said rear platform, means in association with the rear platform for rotating a console mounted thereon in a substantially horizontal plane relative to said rear platform, and means in association with said rear platform for tilting said rear platform about a substantially horizontal axis, whereby the front and rear platforms may be independently adjusted relative to the planar work surface to thereby adjust the relative positions of the keyboard and console of a word processor.

2. A work station as claimed in claim 1 including means in association with said front platform for tilting the platform about a substantially horizontal axis.

3. A work station as claimed in claim 1 or 2, wherein said front opening has opposite ends extending inwardly substantially at right angles to the front edge of said work surface, and walls project downwardly from the opposite ends of said front opening, wherein each of said end walls has a substantially vertical slot therein, and wherein the means for

raising and lowering said front platform comprises adjustment knobs having threaded shanks projecting inwardly through said slots, the inner ends of said threaded shanks being in threaded engagement with the adjacent ends of said front platform.

4. A work station as claimed in claim 1, 2 or 3 including means for tilting said front platform relative to said planar work surface about a substantially horizontal axis extending substantially parallel to the front edge of said front platform.

5. A work station as claimed in claim 4 wherein the means for tilting said front platform comprises additional substantially vertically disposed slots in said end walls, and pins projecting outwardly from the ends of said front platform, said pins being engaged in said additional slots.

6. A work station as claimed in any one of the preceding claims wherein a bottom wall underlies said rear opening in spaced relation thereto, and wherein the means for raising and lowering said rear platform comprises a lifting mechanism mounted on said bottom wall and operatively connected to said rear platform, said lifting mechanism including actuating mechanism accessible from the front of said work station.

7. A work station as claimed in claim 6 wherein said rear opening and said bottom wall define a well therebetween, and panel means closing the rear of said well, said panel means comprising a first panel secured and projecting upwardly from said bottom wall to close the lower rear portion of said well, and a second panel secured to and projecting downwardly from said rear platform, said second panel overlapping said first panel, whereby said second panel will move relative to said first panel as said rear platform is raised and lowered.

8. A work station as claimed in any one of the preceding claims wherein the means in association with said rear platform for moving a console mounted thereon forwardly and rearwardly comprises a base member overlying said rear platform, and slide means mounting said base member for slidable movement relative to said rear platform.

9. A work station as claimed in any one of the preceding claims wherein the means in association with said rear

platform for rotating a console mounted thereon comprises a base member overlying said rear platform, and means mounting said base member for rotational movement relative to said rear platform.

10. A work station as claimed in claim 8 or 9 including turntable means in association with said slide means for additionally mounting said base member for rotation relative to said rear platform.

11. A work station as claimed in any one of the preceding claims wherein the means in association with said rear platform for tilting said rear platform comprises a base member overlying said rear platform, and adjustment means for tiltably mounting said base member relative to said rear platform.

12. A work station as claimed in claim 11 wherein said adjustment means comprises rockers projecting downwardly from said base members for contact with an underlying supporting surface; bracket means projecting upwardly from the underlying surface adjacent said rockers, arcuate slots in said rockers, and adjustment knobs having threaded shanks extending through said slots and in threaded engagement with said bracket means.

13. A work station as claimed in claim 12 wherein the underlying support surface comprises a second base member interposed between said rear platform and said first named base member, and means mounting said second base member for movement in a substantially horizontal plane relative to said rear platform.

14. A work station as claimed in claim 13 wherein the means mounting said second base member for movement in a substantially horizontal plane comprises a combined slide and turntable mounting said second base member for front to rear sliding movement and for rotational movement relative to said rear platform.



15. A work station as claimed in any one of the preceding claims substantially as herein described with reference to the accompanying drawings.



DATED: 6 November, 1986.

PHILLIPS ORMONDE AND FITZPATRICK  
Attorneys for:  
HAMILTON SORTER CO., INC.

*David B. Fitzpatrick*

11 051/83

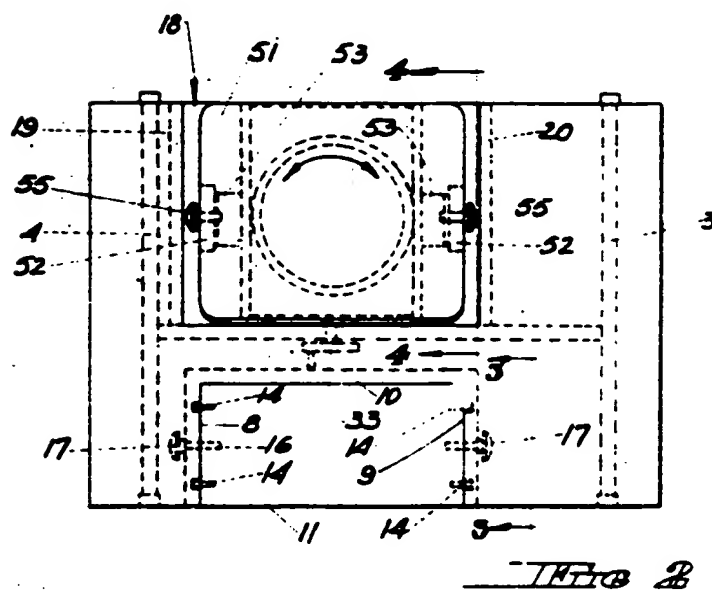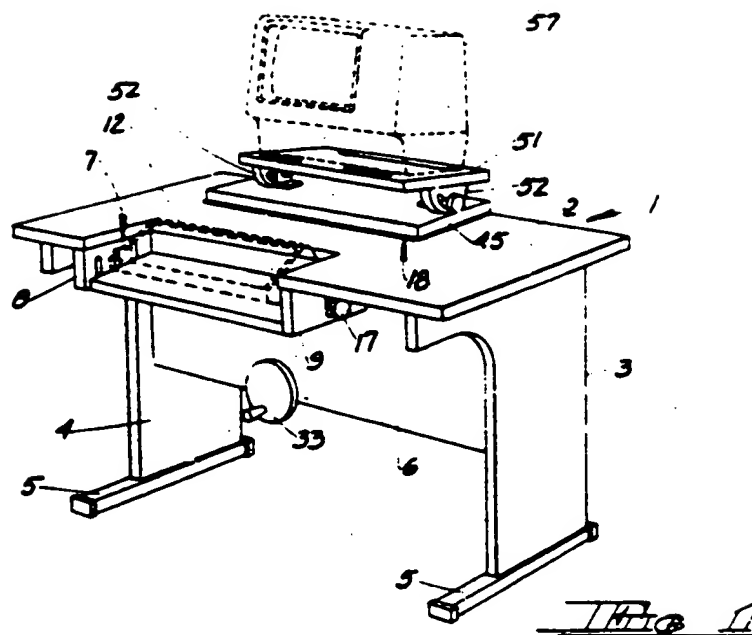

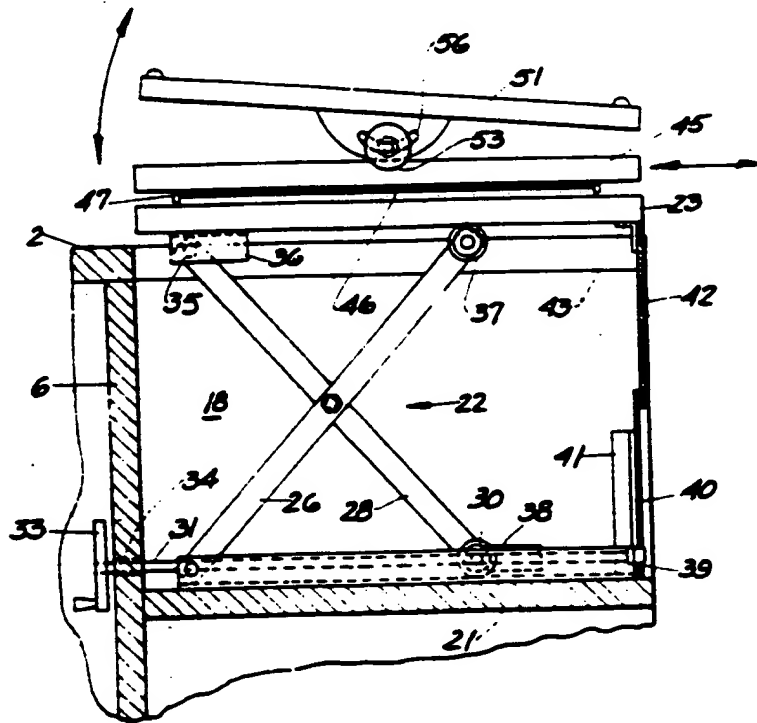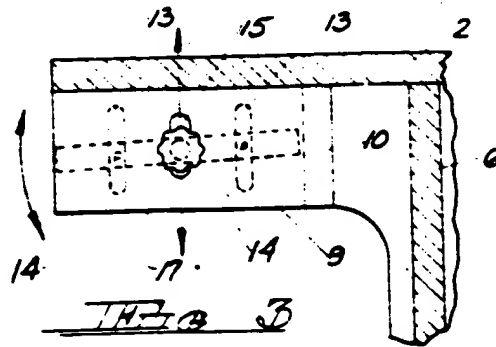

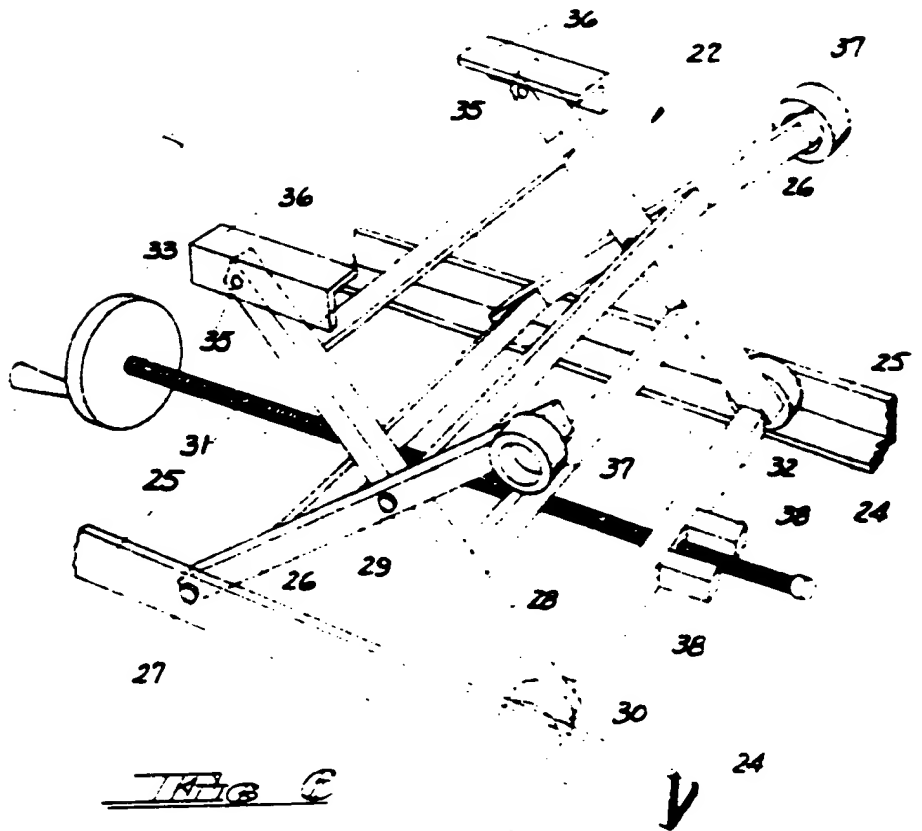
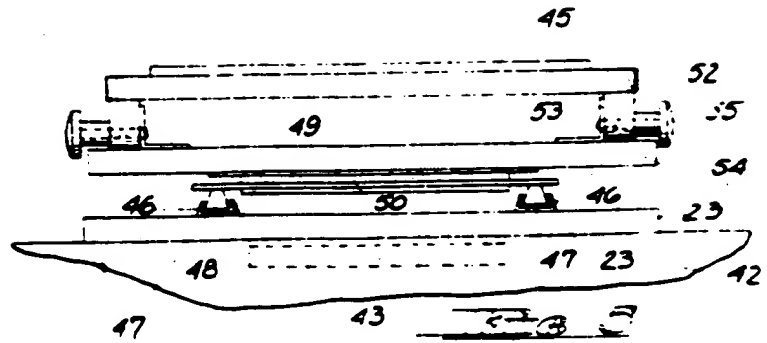


FIG. C